



The Ubeida UB810/UB815 Series

The Ubeida UB810/UB815 series headsets are all-new generation of headsets for contact center, office, Unified Communications, and on-line education. The ergonomic and lightweight design makes it comfortable enough for long conference calls and all day use. The outstanding noise-reducing technology, high reliability can meet different using scenarios.

• Luxurious Comfort

Ergonomic design, protein leather ear cushion cover and headband cushions to reduce ear and head pressure. Adjustable headband and microphone boom to provide great flexibility.

• Hearing Protection

Unique Hearing Protection Technology instantly removes any harmful loud sounds, which keeps the sound level in the safe range (< 118dB) and protects your hearing.

• Powerful Noise Reduction

UB815 series - dual microphone array with precise positioning. Use advanced near-end talk ENC and far-end talk SVC wideband noise cancellation technology, which can reduce up to 99% (maximum 40dB) noise.

• Superior HD Sound Quality

Wideband technology speakers let you have lifelike, vibrant conversations and reduce listening fatigue.

• High Reliability

Metal parts are used in key parts to maximize durability. Use tensile fiber cable to ensure the long life span of the headset.

• Multiple Connecting Options

Support USB-A/USB-C/3.5mm/QD Connections.




UB810D/UB815D Binaural Series




UB810/UB815 Monaural Series


• The Connection Method

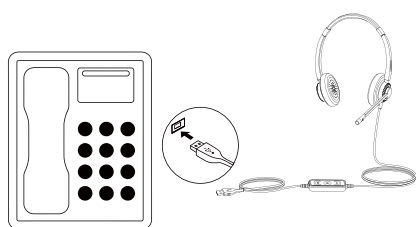

Desktop Phone With USB Interface

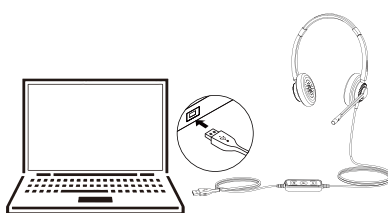

Soft Phone Via PC/Laptop



Mobile Phone/ Tablet

• Technical Specifications

Model/	Monaural Binaural	UB810P UB810DP	UB810J UB810DJ	UB810JT UB810DJT	UB810M UB810DM	UB810JM UB810DJM	UB815M UB815DM
Audio Performance	Hearing Protection	118dBA SPL	118dBA SPL	118dBA SPL	118dBA SPL	118dBA SPL	118dBA SPL
	Speaker Size	Φ28	Φ28	Φ28	Φ28	Φ28	Φ28
	Speaker Max Input Power	50mW	50mW	50mW	50mW	50mW	50mW
	Speaker Sensitivity	105±3dB	105±3dB	105±3dB	105±3dB	105±3dB	105±3dB
	Speaker Frequency Range	100Hz ~ 6.8KHz	100Hz ~ 6.8KHz	100Hz ~ 6.8KHz	100Hz ~ 6.8KHz	100Hz ~ 6.8KHz	100Hz ~ 6.8KHz
	Microphone Directionality	Noise-canceling Cardioid	Noise-canceling Cardioid	Noise-canceling Cardioid	Noise-canceling Cardioid	Noise-canceling Cardioid	ENC Dual Mic Array Omni-Directional
	Microphone Sensitivity	-40±3dB@1KHz	-40±3dB@1KHz	-40±3dB@1KHz	-40±3dB@1KHz	-40±3dB@1KHz	-40±3dB@1KHz
	Microphone Frequency Range	100Hz ~ 8KHz	100Hz ~ 8KHz	100Hz ~ 8KHz	100Hz ~ 8KHz	100Hz ~ 8KHz	100Hz ~ 8KHz
Call Control	Call answer/end, Mute, Volume +/-	NO	NO	Yes	Yes	Yes	Yes
Wearing	Wearing Style	Over-the-head	Over-the-head	Over-the-head	Over-the-head	Over-the-head	Over-the-head
	Mic Boom Rotatable Angle	320°	320°	320°	320°	320°	320°
	Headband/Ear Cushion	Protein leather	Protein leather	Protein leather	Protein leather	Protein leather	Protein leather
Connectivity	Connects to	QD	Desk phone PC Soft Phone Mobile Phone	Desk phone PC Soft Phone Mobile Phone	Desk phone PC Soft Phone	Desk phone PC Soft Phone	Desk phone PC Soft Phone
	Connector Type	QD	3.5mm	3.5mm USB-C	USB	3.5mm USB	USB
	Cable Length	90cm	120cm	240cm	240cm	240cm	240cm
General	Package Content	QD Headset User Manual	3.5mm Headset User Manual	3.5mm Headset USB-C Adaptor User Manual	USB Headset User Manual	3.5mm Headset USB-C Adaptor User Manual	USB Headset User Manual
	Outer-Carton Size	190*155*40mm	190*155*40mm	190*155*40mm	190*155*40mm	190*155*40mm	190*155*40mm
	Weight w/ Cable (Mono/ Duo)	70g/93g	68g/92g	97g/120g	100g/123g	102g/125g	100g/123g
	Working Temperature	-5°C ~ 45°C	-5°C ~ 45°C	-5°C ~ 45°C	-5°C ~ 45°C	-5°C ~ 45°C	-5°C ~ 45°C
	Warranty	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years
	Certifications						